




**PRESSURE - VOLUME ANALYSIS ("W.G./C.F.M)**

"W.G.	CUBIC FT./MIN	
	PAOM 0.75HP	PAOM 1.5HP
6.5	-	100
6.0	150	400
5.5	250	550
5.0	375	700
4.5	450	810
4.0	515	905

**PRESSURE - VOLUME ANALYSIS (Pa. or mm<sup>3</sup>/Hr)**

Pa.	mm	CUBIC METRE/HR.	
		PAOM 0.75HP	PAOM 1.5HP
1625	162.5	-	170
1500	150	255	680
1375	137.5	425	935
1250	125	638	1050
1125	112.5	765	1377
1000	100	876	1539

**PERFORMANCE PAOM 0.75/1.5HP**

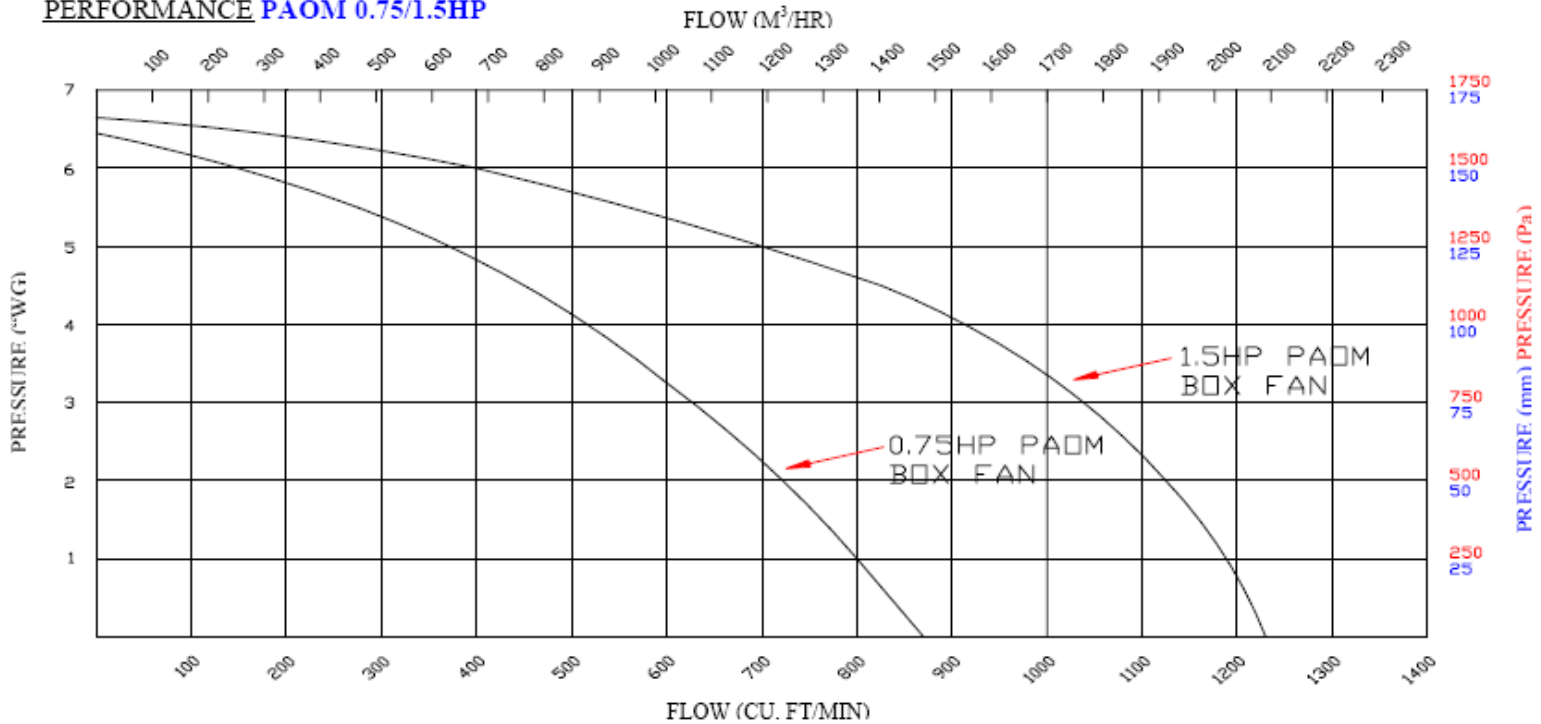

**SPECIFICATION**

	PAOM 0.75HP	PAOM 1.5HP
MATERIAL	HIGH IMPACT ABS/UV STABILISED WITH ACRYLIC CAP	
MOTOR / RUNNING AMPS	SINGLE PHASE / 3.8A	SINGLE PHASE / 6.5A
TYPE	PERMANENT CAP. 16µF	
RATED OUTPUT	550 WATTS	1100 WATTS
ELECTRICAL SUPPLY	220/240V 50Hz	
FAN DIMENSIONS	mm's.=220.00(W)x370.00(D)x435.00(H) INS.=8.5(W)x14.5(D)x17(H)	
FAN WEIGHT (Kg's)	12.0	13.5
INSULATION CLASS	CLASS F	
SPEED	2850 R.P.M.	
PLUG TYPE	SUPPLIED WITH U.K. OR EUROPEAN (SCHUKO) PLUG	

**ALL FANS ARE CE MARK APPROVED AND COMPLY WITH CURRENT EEC STANDARDS**